




Application of US Sailing Bow Stickers

1. **VERY IMPORTANT!!!** Make sure surface area is clean of dirt and grime (**for best results, wipe area with alcohol wipes**).
2. Peel back 1 inch of backing along entire length of sticker's top edge.
3. Align top of sticker 1/4 of way down between sheer and waterline, top edge parallel to sheer. It should be a vertical hand's width from the bow.
4. Apply exposed top edge of sticker to boat.
5. Slowly remove backing with gentle pressure downward and smooth out sticker on hull. Use hard edge to take out any air bubbles.
6. Repeat for other side of boat.

ILCA, i420, 29er:

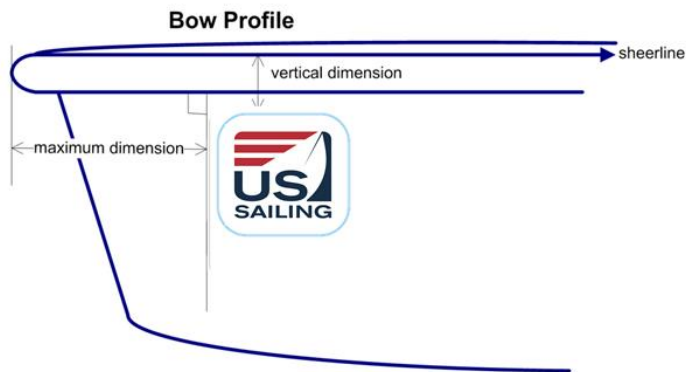

Nacra:



Application of Top Sail Numbers



1. **VERY IMPORTANT!!!** Make sure surface area is clean of dirt and grime (**for best results, wipe area with alcohol wipes**).
2. Parallel to top batten.
3. Above top batten on starboard side of sail. Below the top batten on port side of sail
4. Approximately 2 inches from the leech..